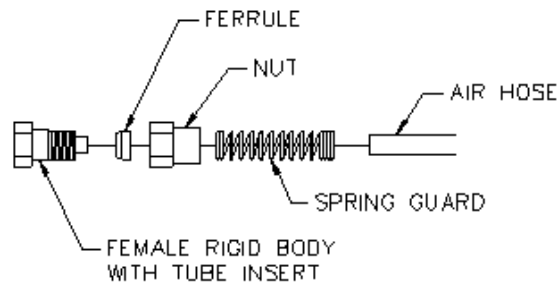
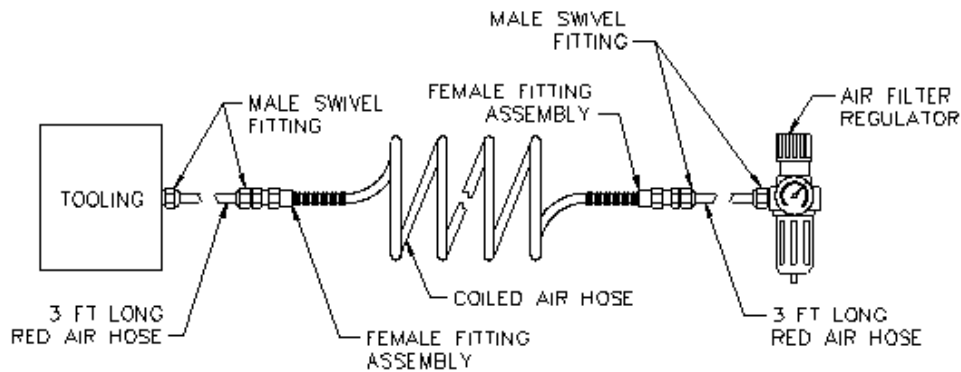


1. Assemble female fittings to the coiled air hose according to **diagram 1**. The air hose is inserted through the spring guard, nut, ferrule, and over the tube insert as far as possible. Note the orientation of the ferrule: the bevel is pointing towards the female fitting.
2. Assemble the remainder of the components per **diagram 2**.



**Diagram 1.** Female fitting assembly



**Diagram 2.** Air hose assembly.