

PORTABLE ERGONOMIC CONVEYOR SYSTEMS

Safety Features and Comparisons

Increase **Productivity.**
Improve **Safety.**
Promote **Ergonomics.**




Image includes optional equipment.

Destuff-it™ and Restuff-it™ Features at a Glance

| | | | |
|---------------------------------|---|---|--|
| Weight 3,700 lbs | Width / Height 81 / 83 in | Pivoting Conveyor Width 24 in | Power Supply 480 V / 3 PH / 60 HZ |
| Belt Capacity 165 lbs | Belt Speed (Min / Max) 86 / 108 fpm | Travel Speed 50 fpm | Operator Platform Capacity 550 lbs |



Gravity Skate Wheels on Destuff-it rear conveyor (for unloading)



Powered Belt on Restuff-it rear conveyor (for unloading and loading)

- Destuff-it™ is designed for unloading operations and contains a conveyor belt that moves in one direction
- Restuff-it™ may be used for both loading and unloading due to its bi-directional conveyor
- Numerous models and conveyor options exist including flexible powered, fixed telescopic, and cascading belt
- Typical length is 11.2 - 12.2 feet, depending on model


Installations



Safety Features



E-Stops cease all machine motion.

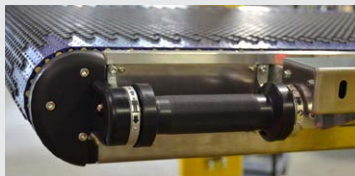

Hand-present sensor located on **Rotary Handle** must be activated for control operation.



Front Sensing Edge (on Operator Platform) stops forward motion when activated.



Pressure Sensing Safety Mats stop the machine when activated.



Operator Pressure Sensing Mat must be activated for machine operation.



LED Strips provide workers with additional light.

Optional Accessories



Safety Guard Rails protect workers from falling.



Front and rear **Area Scanners** detect persons or objects, slow machine and avoid obstacles.